


240 VOLT DUAL ELECTRONIC-THERMOSTAT TANK HEATING SYSTEM CONTROLLER

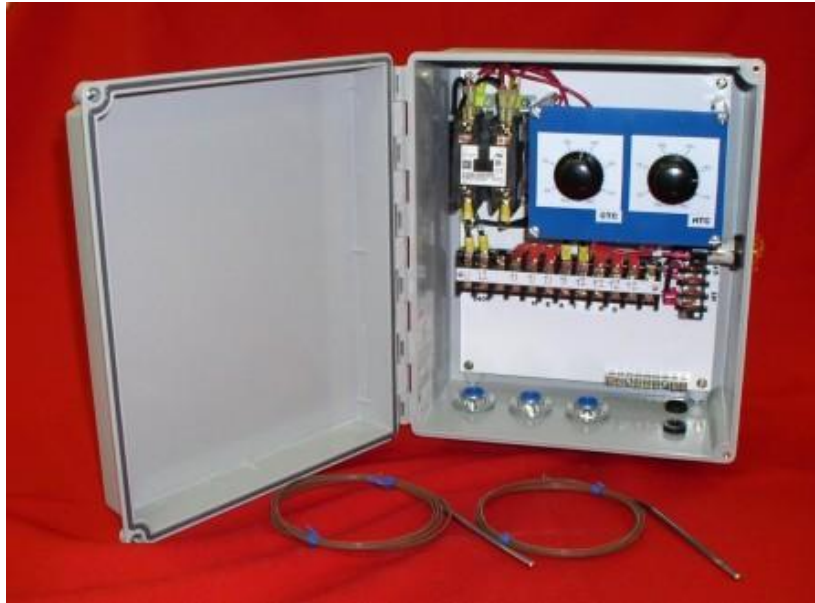

The fiberglass enclosure is UL/CSA listed for use in NEMA 4, 4X, 12 and 13 environments. Employing two electronic controllers, the assembly can be used for a variety of tank and pipe heating applications requiring reliable control. Components carry UL, CSA, and CE approval with internal wiring that is NEC and IEEE compliant. The complete assembly can be provided with a UL/CUL approval stamp per customer request.

Specifications:

Enclosure NEMA 4, 4X, 12, 13	12"x10"x6"
Control Thermostat (CT)	0-150°F 20 Amp Rated
Over-Temperature Thermostat (HT)	50-175°F 20 Amp Rated
Contactor	30 Amp Rated, 240 Volt Coil
Terminal Block	12 Point, 30 Amp, 600 Volt
Power on Light	LED Amber
Thermocouples (2)	Type J, 4" Probe, 10'-0" Leads